


# 單 PIN 動力和焊接接頭

Cam-lok 雙凸輪提供確實、耐震接點。只要轉動 1/3 即提供將近每平方英寸 600 磅的高壓接點和最小的電阻，提供電氣及機械最好的銲接條件。因為表面沒有滑動，所以不會有弧光和銲接時所造成燃燒痕跡。

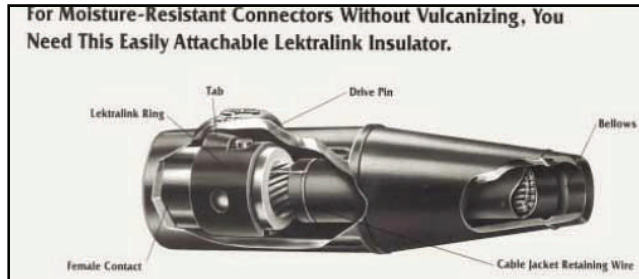

## E1012 Connectors for cable size #2-4/0 120 V, 連續放電 315 A, 間歇放電 550 A

Male	Cable size	Color	Male Plug Part No.	Female Plug Part No.	Angle	Female Terminal Connector
	#2-#1	Black	E1012-8006	E1012-8056	Angle	offset
	#2-#1	Red	E1012-8008	E1012-8058		
	1/0-2/0	Black	E1012-8012	E1012-8062	Angle	offset
	1/0-2/0	Red	E1012-8014	E1012-8064		
	3/0-4/0	Black	E1012-8030	E1012-8080		
	3/0-4/0	Black	E1012-8030	E1012-8080	Angle	offset
	3/0-4/0	Red	E1012-8032	E1012-8082		

Cable size	Color	Angle Style Part No.	Offset Style Part No.
#2-4/0	Black	A201317-1	A201317-5
#2-4/0	Red	A201317-2	A201317-6
4/0	Black	A201317-3	N/A
4/0	Red	A201317-4	N/A

## E1017 Connectors for cable size 350-700 MCM 600V, 連續放電 690A, 間歇放電 1150A

Male	Cable size	Color	Male Plug Part No.	Female Plug Part No.
	500 MCM	Black	E1017-7	E1017-56
	500 MCM	Red	E1017-9	E1017-58
	500 MCM	Green	E1017-11	E1017-60
	750 MCM	Black	E1017-13	E1017-62
	750 MCM	Red	E1017-15	E1017-64
	750 MCM	Green	E1017-17	E1017-66

Female	Cable size	Color	Female Plug Part No.
	750 MCM	Red	E1017-64
	750 MCM	Green	E1017-66

## E1019 Connectors for cable size 350-700 MCM 120V, 連續放電 690A, 間歇放電 1150A

Male	Cable size	Color	Male Plug Part No.	Female Plug Part No.	Angle	Female Terminal Connector
	350MCM	Black	E1019-1	E1019-50	Angle	offset
	500MCM	Black	E1019-7	E1019-56		
	750MCM	Black	E1019-13	E1019-62	Angle	offset
	750MCM	Black	E1019-13	E1019-62		

Cable size	Color	Angle Style Part No.	Offset Style Part No.
350MCM-	black	E1019-575	E1019-625
750MCM			