



- ▶ Class I, Div 2, Group A,B,C,D 適用氣體防爆危險場所
- ▶ Class II, Group E,F,G 適用粉塵防爆危險場所
- ▶ Class. III 適用纖維防爆危險場所
- ▶ 保護等級:NEMA 4X, IP66
- ▶ UL844 適用防爆危險場所
- ▶ UL1598 適用一般照明
- ▶ UL1598A 適用船上照明使用(防水,耐蝕,耐震)
- ▶ 本體材質:鑄鋁+環氧樹脂粉體耐蝕塗裝
- ▶ 耐熱強化玻璃燈罩
- ▶ 不鏽鋼外部固定配件
- ▶ LED 色溫: 5000K, (白光) 70 CRI
3000K, (黃光) 80 CRI
- ▶ 電壓: 120-277VAC, 50/60Hz
- ▶ 功率因數: > 0.90

	型號	LED 流明	LED 瓦數	燈效率 LM/Watt	可替代鈉光燈泡
	VMV3L	3,531	29W	122	70W-100W
	VMV5L	5,335	43W	124	100W-150W
	VMV7L	6,616	55W	120	150W-175W
	VMV9L	9,266	85W	109	250W-320W
	VMV11L	11,440	113W	101	320W-400W


立柱式 1-1/2"NPT, 25° angle

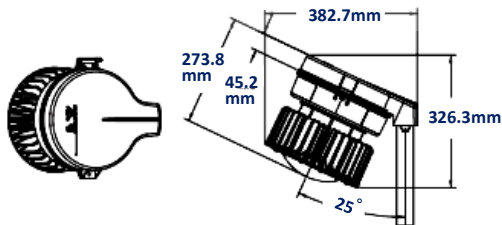

吸頂式 3/4"NPT

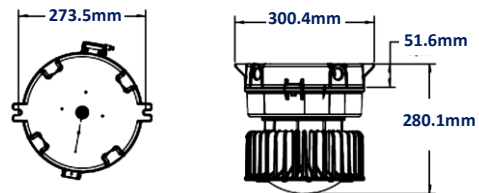

吊管式 3/4"NPT

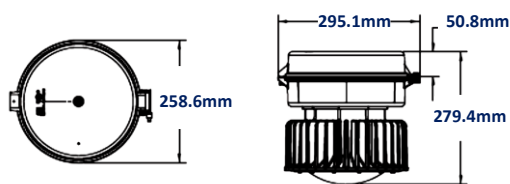

壁掛式 3/4"NPT

